



Clifford & Snell

V4 IS

Intrinsically Safe LED 'Flashing' Beacons

Yodac

Tom Cribb Road, Thamesmead,
London SE28 0BH
Tel: +44 (0)20 8316 4477
or (0)20 8317 1717
Fax: +44 (0)20 8317 2400
Email:sales@cliffordandsnell.com
Web Site: www.cliffordandsnell.com




ATEX

NEW Intrinsically Safe
'Flashing' Beacons

MAIN FEATURES

- BASEEFA (ATEX) approved
- 8 LED array allowing condition or status alert in flashing mode
- Continuously rated
- High light intensity
- Long life LED design
- Reliable and simple to install
- Red / White flame retardant ABS plastic enclosure
- Anti static enclosure and lens
- Up to 4 modules in any combination of lens colour ranging from Red, Amber, Green, Opal, Blue, Clear
- Each beacon should be wired independently.

DIMENSIONS mm

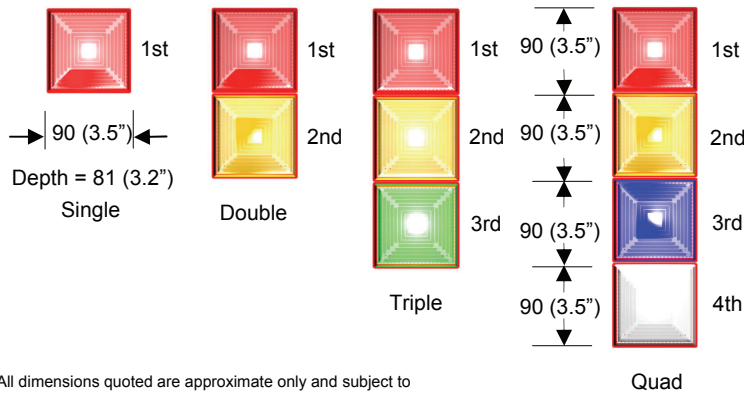

All dimensions quoted are approximate only and subject to change without notice as are technical features resulting from continual development and improvement.

TECHNICAL SPECIFICATION

- For use in Zones 0, 1 and 2
- Operating voltage 12Vdc, 18Vdc, 24Vdc via ATEX approved barriers
- Operating temp range -20 to + 40deg C
- Storage temp range -40 to + 70deg C
- Relative humidity 90% @ 40deg C
- IP65 rated
- Flash rate 1 per second
- Weight: Single 0.15 Kg, Double 0.3 Kg, Triple 0.45 Kg, Quad 0.6 Kg
- EEx ia IIC T4

MOUNTING

All units are supplied separate from the back box for ease of installation. The back box should be mounted to a reasonably flat surface or bulkhead. A gasket is supplied, should the surface be uneven, or if the unit is to be used in wet conditions. The installation is completed by fitting the beacon onto the back box by means of the supplied screws.

LINE MONITORING

Monitoring via reverse polarity
End of line resistor minimum 3K3 ohms 0.5 watts wire-wound or metal film type

ORDERING INFORMATION

Base Colours:
RF = Red flame
WN = White
RN = Red Normal

APPROVAL SPECIFICATION

ATEX DIRECTIVE - 9/94/EC
EN 60079-0:2004 (EN50014:1997 + Amendments 1 & 2)
EN60079 -1:2004 (EN50020:2002) EN50284:1999
Baseeefa certificate No. BAS05ATEX0075

CONFIGURATOR

Unit Type

V4 LED Intrinsically Safe
'Flashing' Beacon

Number of Modules (leave blank if single unit)
or 2,3 or 4

Supply Voltage 12, 18 & 24Vdc

Lens Colours
Red Amber Green Opal Blue Clear

Single Double Triple Quaduple

Base Colours
Red Flame
White
Red Normal

